AASTRA *Your Connection to the World*

6730i and 6731i Headset Setup and Configuration

© 2009 Aastra Telecom

Contents

- Connecting a headset with an amplifier
- Connecting a headset without an amplifier
- Headset configuration using the Phone UI
- Making and Receiving Calls using the Headset
- Recommended Headset List

© 2009 Aastra Telecom

6730i/6731i – Headset Connection with Amplifier

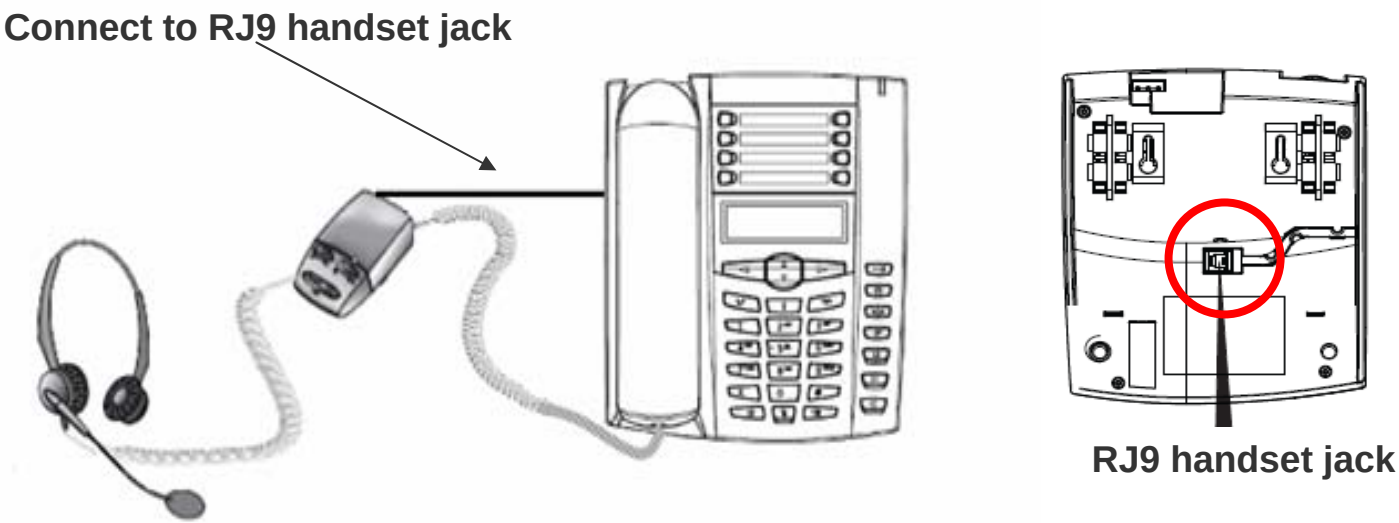

- Unplug the handset cord from the RJ9 jack on the bottom of the phone and plug it into the handset jack on the amplifier.
- Plug the telephone cord from the amplifier into the RJ9 jack on the bottom of the phone.
- Connect the headset to the headset port on the amplifier.

© 2009 Aastra Telecom

6730i/6731i – Headset Connection without an Amplifier

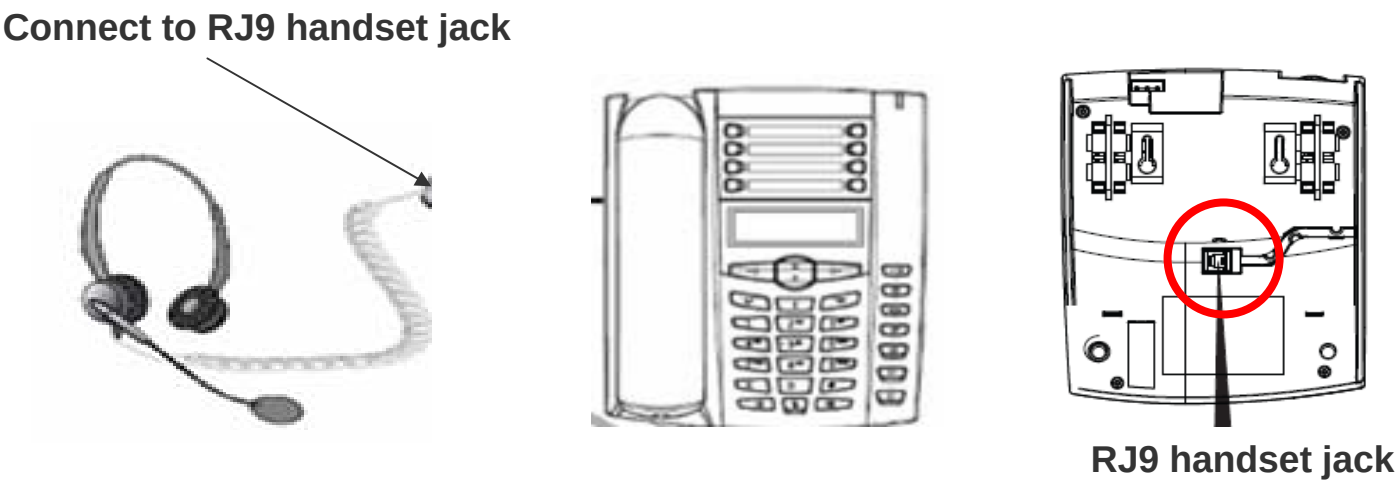

- Unplug the handset cord from the RJ9 jack on the bottom of the phone.
  - **NOTE:** If setup this way the handset will no longer be connected so it can't be used.
  - The speakerphone still remains fully useable.
- Plug the headset cord into the RJ9 jack on the bottom of the phone.

© 2009 Aastra Telecom

6730i/6731i – Headset Configuration using the Phone UI

- Press the **“Options”** key on the phone and toggle down to.
  - **Preferences**
  - **Set Audio**
  - **Audio Mode**

- Once in **“Audio Mode”** select either;
  - **Headset/Speaker**
  - **Speaker/Headset**

© 2009 Aastra Telecom

6730i/6731i – Making and Receiving Calls using the Headset

- Making and Receiving Calls Using a Headset;
  - Press the Speaker key to obtain a dial tone or to answer an incoming call. Depending on the audio mode selected from the options menu, a dial tone or an incoming call is received on either the headset or the hands free speakerphone.
  - Press the Goodbye key to end the call.

© 2009 Aastra Telecom

6730i/6731i– Recommended Headset Model List

- The following is a list of recommended Headset Models;
  - **GN Netcom**
    - 2110ST
    - 2120NC
    - 2127
    - 9120
    - 9120NC
    - GN9350
  - **Plantronics**
    - H251N
    - HW251
    - P251-U10P
    - CS70N
    - 510SL
  - **Sennheiser**
    - SH330

© 2009 Aastra Telecom